
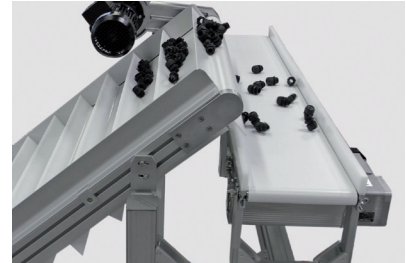


## INCLINE CONVEYOR WITH PERPENDICULAR DISCHARGE

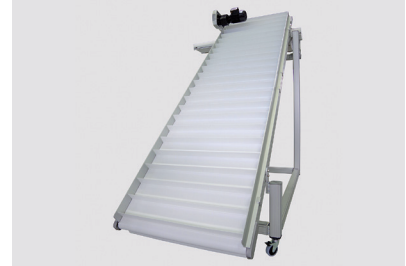

### TECHNICAL DATA


|                              |   |
|------------------------------|---|
| Type                         | GTB-800 Max Conveyor                      |
| Drive                        | End drive, at the top                     |
| Conveyor belt width          | 31.5 in (800 mm)                          |
| Useable width                | 29 in (737 mm)                            |
| Transport length             | 106.7 in (2710 mm)                        |
| Max. transport weight        | 220.5 lb (100 kg)                         |
| Speed                        | 28.5 ft/min (8.7 m/min)                   |
| Inclination                  | 70.8 in (1800 mm)                         |
| Belt type endless            | F-8EXWT with cleats 7.7 in (118.5 mm) gap |
| Cleat width                  | 28.7 in (730 mm) centered                 |
| Belt type discharge conveyor | Conveyor TB30-250                         |
| Drive discharge conveyor     | Three-phase motor center drive            |
| Substructure                 | Quick-Set framing system, mobile          |

### PROJECT DESCRIPTION

Candy is ejected from production equipment onto an incline conveyor (GTB) featuring a silicone belt with cleats. The GTB elevates the products and discharges onto a perpendicular TB30 conveyor, the sweets are checked with a camera and conveyed either to the left or right for further processing.

### INDUSTRY

Packaging

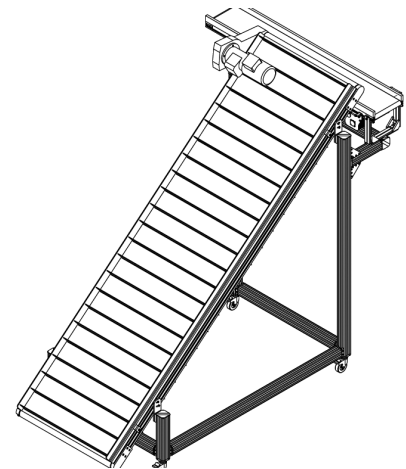

**MONTECH**<sup>®</sup>  
more than technology

Montech Conveyors Corp.  
Daetwyler Plaza  
13420 Reese Blvd West  
Huntersville, NC 28078, USA  
Phone +1 704 659 2187  
info.us@montech.com